



*Model PCXB/G-6AL Surface Mount Bench  
with Hot-Dip Galvanized Frames,  
6 Ft. long with Aluminum seat and back.*

- **Extra heavy design to be stronger and more stable with a simple, clean style**
- **Sturdy, formed and welded steel frame construction**
- **Frames are Hot-Dip Galvanized after fabrication for superior corrosion resistance**
- **Structurally reinforced extruded Aluminum Seats with clearanodized finish**
- **Quality construction throughout**

#### AVAILABLE OPTIONS

- 4', 6', or 8' models
- Powder Coat Finish in choice of colors or Black Enamel
- Painted steel frame components

#### SPECIFICATIONS:



- **Model PCXB** end frames shall be one-piece, welded construction with a back and seat bracket of 2-3/8" x 1-1/2" x 1/8" nominal sized, die-formed channel, and a 2.375" (2-3/8") O.D. post and foot to meet 2" nominal steel pipe size specifications. Frame foot shall be formed with flattened and rounded ends. A 9/16" hole shall be provided in each end of foot for optional surface mounting with concrete anchors (anchors not included).
- **Model PCXB/G-4AL** shall be 4 ft. long (nom.).
- **Model PCXB/G-6AL** shall be 6 ft. long (nom.) with diagonal braces.
- **Model PCXB/G-8AL** shall be 8 ft. long (nom.) with diagonal braces.
- **Standard:** Frames and diagonal braces shall be hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no.).
- Aluminum shall be extruded 6063-T6 aluminum alloy in planks with dimensions equivalent to that of 2" x 10" nominal sized lumber. The plank design shall be 1-3/4" x 9-5/8" with four structural reinforcement ribs for greater rigidity. Aluminum planks shall be provided with a clear anodized finish as per anodizing specification 204 R1.
- Channel end caps shall be of extruded 6063-T6 aluminum alloy provided with a clear anodized finish as per anodizing specification 204 R1. End caps shall be press fitted over ends of aluminum planks and shall be mechanically fastened in place at the factory.
- Aluminum planks shall be provided with galvanized carriage bolts and precision fitted aluminum brackets to fasten planks to bench frames.
- **Optional:** Frames and diagonal braces shall be finished in black enamel paint. (To specify, change "/G" to "/B" in model no., e.g. PCXB/B-6AL.)
- **Optional:** Color choices of powder coated steel frame components. For optional colors choices see Specification Bulletin # SPC-CO-001.

**R.J. THOMAS MFG. CO., INC.**



**P.O. Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796**

**E-mail: [pilotrock@rjthomas.com](mailto:pilotrock@rjthomas.com) • Web Site: <http://www.pilotrock.com>**

© 2005 R. J. Thomas Mfg. Co., Inc. PILOT ROCK® Park Equipment is a registered trademark of R. J. Thomas Mfg. Co., Inc.

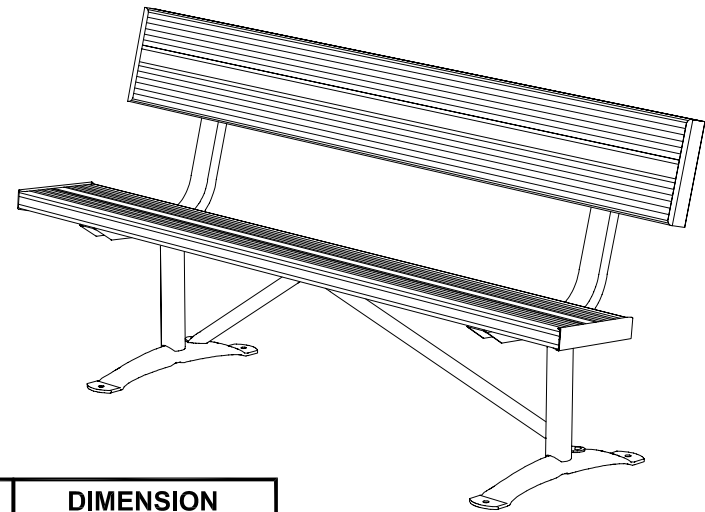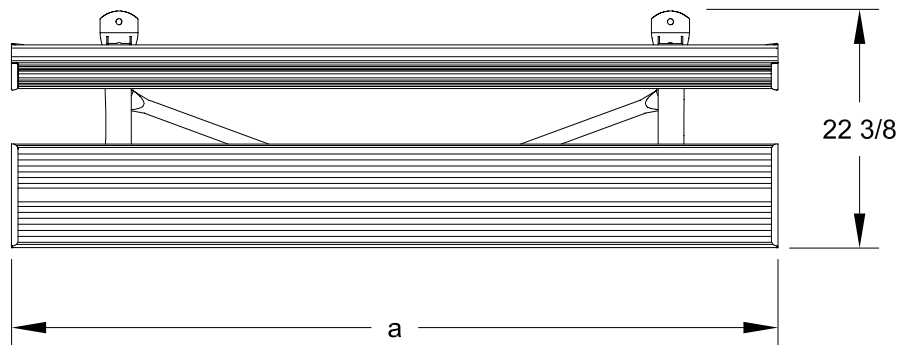

MODEL NUMBER	DIMENSION	
	a	b
PCXB-4	48	36
PCXB-6	72	51-3/4
PCXB-8	96	70

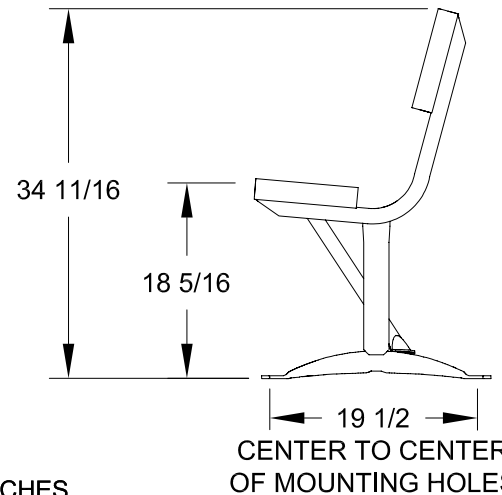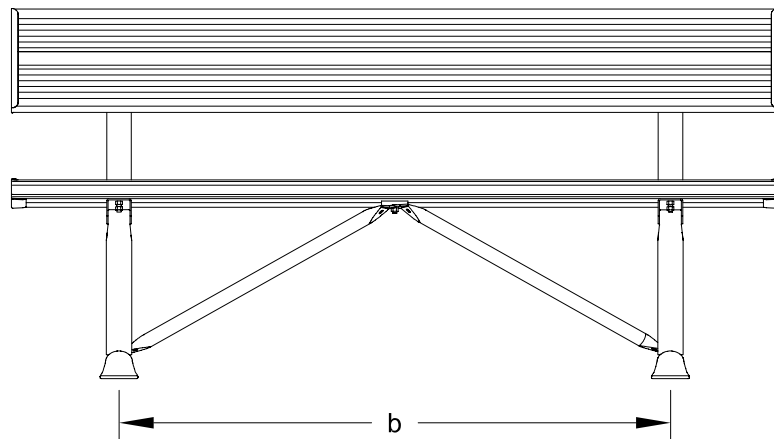

ALL DIMENSIONS IN INCHES

CENTER TO CENTER OF MOUNTING HOLES

R. J. **THOMAS MFG. Co., INC.**  
P.O. Box 946 • Cherokee, IA 51012

DRAWN BY  
**WWM**

TITLE MODEL PCXB 4, 6, AND 8 FOOT PORTABLE/SURFACE MOUNT BENCH WITH 2" X 10"  
ALUMINUM SEAT AND BACK PLANKS

DATE 3-30-05

DWG. NO. AI-1640