

*Model UT/CN-6HN Portable Rectangular Table
with Green Powder Coat Frames, 6 Ft. long
with Green H-Type Plastisol Coated Perforated Steel top and seats.*

- **Nontip, nontrip, walk-through design**
- **All-welded end frames are fabricated from 1.660" diameter steel pipe**
- **Diagonal bracing for strength and rigidity**
- **Frames are hot-dip galvanized after fabrication for superior corrosion resistance**
- **Plastisol Coating heat fused to Perforated Steel Seats and Top**
- **Vinyl Plastisol formulated with U.V. stabilizers for ultraviolet protection**
- **Fast, easy assembly using 3/8" dia. galvanized carriage bolts**
- **Limited Lifetime Warranty on frames**

AVAILABLE OPTIONS

- **6' or 8' models**
- **Red, Blue, Black, Green, or Brown Powder Coated or Black enamel painted steel frame components**
- **Plastisol Coated Perforated Steel available in 6 colors**

SPECIFICATIONS:



- **UT Series** end frames shall be one-piece welded construction, fabricated from 1.660" O.D. x (10 ga.) wall steel pipe to meet 1-1/4" nominal pipe size specifications with 2" x 2" x 3/16" A-36 structural grade steel angle for attaching the seats and tops. Bends shall be tightly formed to prevent tipping when weight is on one side.
- Table frame design shall incorporate nontip, nontrip, walk-through design features.
- **Model UT/G-6HW** shall be a nom. 6 ft. in length.
- **Model UT/G-8HW** shall be a nom. 8 ft. in length.
- Nominal table height shall be 31". Nominal seat height shall be 19".
- Frames shall be supported by diagonal braces of 1-5/16" O.D. x 14 ga. wall steel pipe that shall align and provide attachment to the table top.
- All 3/8" dia. galvanized carriage bolts and nuts shall be provided to fasten frames to top and seats.
- **Standard:** Frames and diagonal braces shall be hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no.).
- **H-Type** table top and seats shall each be one-piece welded construction, fabricated from a 14 ga. perforated steel surface with 9/16" dia. holes in a 13/16" center to center in-line pattern and 2-1/2" x 10 ga. roll-formed vertical edges on all sides and reinforced by a 10 ga. die-formed angle substructure. Substructure shall include all mounting holes for easy assembly.
- **Standard:** All steel surfaces of the top and seats shall be covered with a coating of Brown vinyl Plastisol (indicated by "HW" in model no.) formulated with high impact additives, UV inhibitors, and an anti-microbial to resist mold and mildew. Plastisol coating shall be permanently heat-fused to the steel to an average thickness of 125 mils (1/8") for an overall average thickness, including top and bottom coatings, of 250 mils (1/4").
- **Optional:** Frames and diagonal braces shall be finished in black enamel. (To specify, change "/G" to "/B" in model no., e.g. UT/B-6HW.)
- **Optional:** Frames and diagonal braces shall be finished in red, blue, black, brown, or green powder coat. (To specify, change "/G" to "/CR" for red, "/CU" for blue, "/CB" for black, "/CW" for brown, or "/CN" for green in model no., e.g. UT/CB-6HW.)
- **Optional:** Vinyl Plastisol coating shall be available in a choice of five optional colors. Indicate choice of color by changing "HW" in model number to; "HR" for Red, "HU" for Blue, "HI" for Ivory, "HB" for Black, or "HN" for Green.

R.J. THOMAS MFG. CO., INC.



P.O. Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796

E-mail: pilotrock@rjthomas.com • Web Site: <http://www.pilotrock.com>

© 2004 R. J. Thomas Mfg. Co., Inc. PILOT ROCK® Park Equipment is a registered trademark of R. J. Thomas Mfg. Co., Inc.

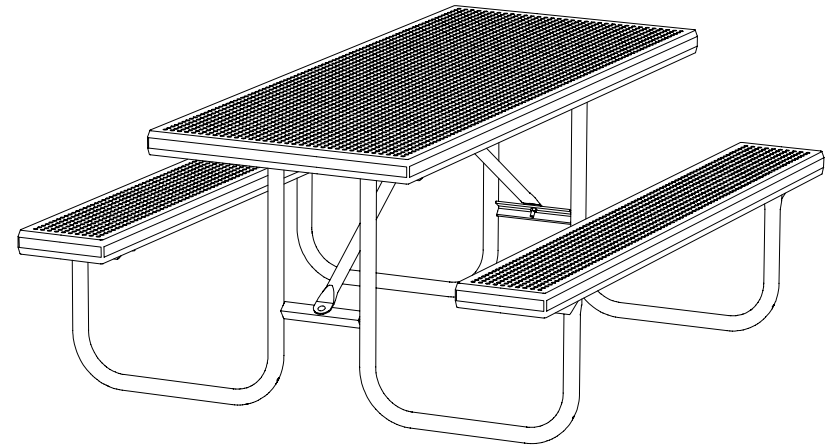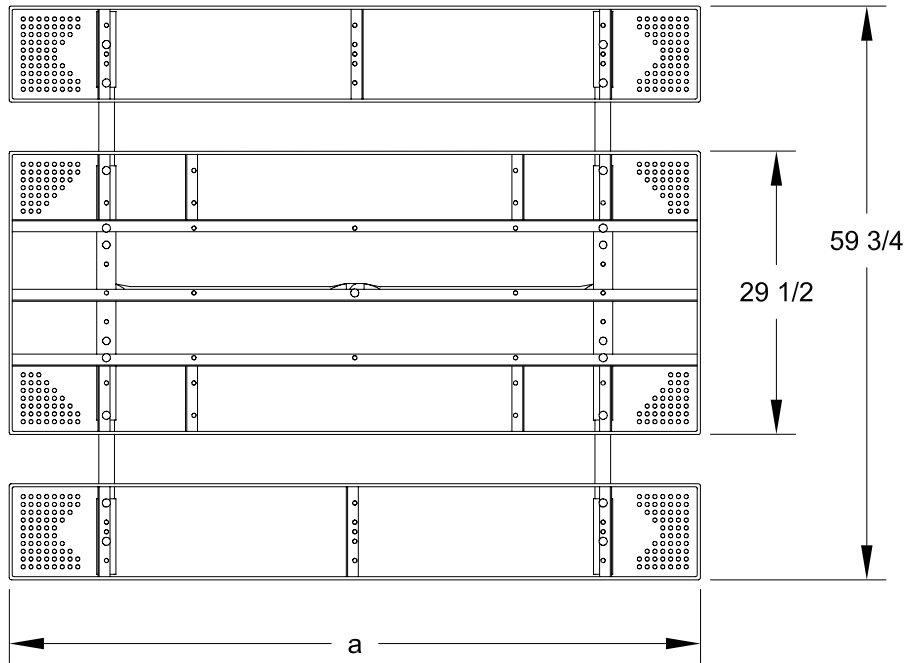

MODEL NUMBER	DIMENSION	
	a	b
UT-6	72	51-3/4
UT-8	96	70

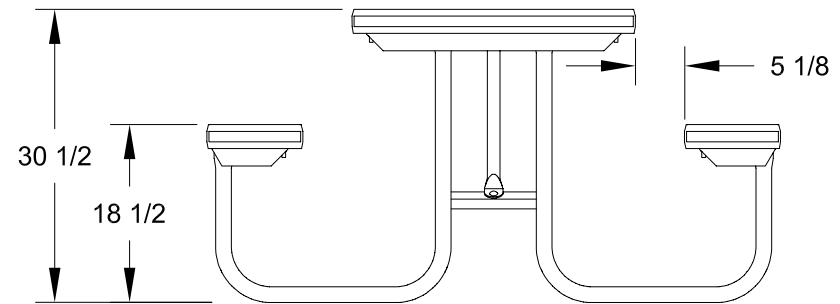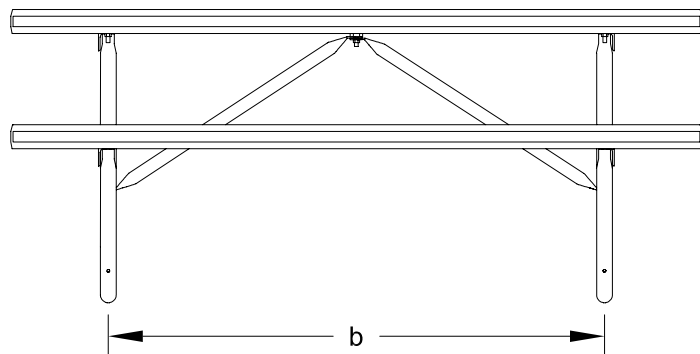

ALL DIMENSIONS IN INCHES

R. J. **THOMAS MFG. CO., INC.**
P.O. Box 946 • Cherokee, IA 51012

DRAWN BY
WWM

TITLE **UT SERIES 6 AND 8 FOOT PORTABLE RECTANGULAR TABLE
WITH H-TYPE PLASTISOL COATED PERFORATED STEEL TOP AND SEATS**

DATE **5-31-06**

DWG. NO. **AI-1624**