



*Model APB/P/G-8V110 Surface Mount Bench
with Hot Dip Galvanized Frames, 8 Ft. long
with 10" wide Ivory Plastisol coated Expanded Steel seat.*

- **Sturdy bench for permanent locations**
- **Frames are hot dip galvanized after fabrication for superior corrosion resistance**
- **Plastisol Coating heat fused to Expanded Steel Seat for durability**
- **Vinyl Plastisol formulated with U.V. stabilizers for ultraviolet protection**
- **Fast, easy assembly using 3/8" dia. galvanized bolts**
- **Quality construction throughout**

AVAILABLE OPTIONS

- 6' or 8' models
- Powder Coat Finish in choice of colors, Galvanized, or Black Enamel Painted steel frame components
- Choice of 5 colors of Plastisol coating
- Choice of colors of Plastisol Coating

6 and 8 Ft. Models

SPECIFICATIONS:



- **Model APB/P** seat frames shall be one-piece welded construction, fabricated from 3" x 6" x 1/8" wall rectangular structural steel tubing with 2" x 2" x 3/16" A-36 structural grade steel angle for attaching the seat material. Exposed ends of rectangular tubing shall be permanently sealed with welded-on steel end caps. Frame shall be provided with 3/8" x 8" x 8" steel base plate with four 25/32" dia. holes for anchoring bench pedestal posts to existing concrete pad (anchor bolts not included).
- **Model APB/P-6** shall be a nom. 6 ft. in length.
- **Model APB/P-8** shall be a nom. 8 ft. in length.
- Nominal seat height shall be 18".
- **Standard:** Frames shall be hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no.).
- **Standard:** Bench seat shall be a 10" wide (indicated by "10" at end of model number), one-piece welded construction, fabricated from a 3/4-#9 expanded steel surface with 10 ga. x 2-1/2" roll-formed vertical edges on all sides and reinforced by a 10 ga. x 2-1/4" x 1-1/4" die-formed angle substructure. Substructure shall include all mounting holes for easy assembly.
- **Standard:** All steel surfaces of the seat shall be covered with a coating of brown (indicated by 'VW' in model number) vinyl Plastisol formulated with high impact additives and UV inhibitors. Plastisol coating shall be permanently heat-fused to the steel to an average thickness of 125 mils (1/8") for an overall average thickness, including top and bottom coatings, of 250 mils (1/4").
- All 3/8" dia. galvanized carriage bolts and nuts shall be provided.
- **Optional:** Frames shall be finished in painted Black enamel. (To specify, change "/G" in model no. to "/B", e.g. APB/P/B-6VW10.)
- **Optional:** Color choices of powder coated steel frame components. For optional colors choices see Specification Bulletin # SPC-CO-001.
- **Optional:** Color choices of plastisol coated steel components. For optional colors choices see Specification Bulletin # SPC-CO-001.
- **Optional:** Seats shall be available in a 12" width. Specify by changing "10" at end of model number to "12".

R.J. THOMAS MFG. CO., INC.



P.O. Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796

E-mail: pilotrock@rjthomas.com • Web Site: <http://www.pilotrock.com>

© 2004 R. J. Thomas Mfg. Co., Inc. PILOT ROCK® Park Equipment is a registered trademark of R. J. Thomas Mfg. Co., Inc.

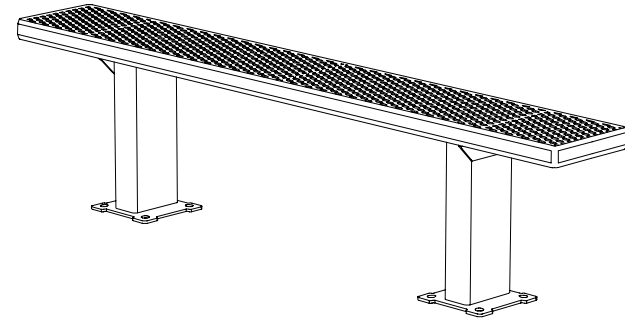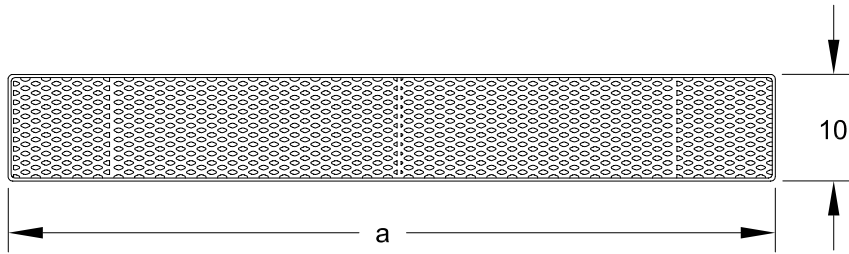

MODEL NUMBER	DIMENSION	
	a	b
APB-6/P	72	44-3/4
APB-8/P	96	63

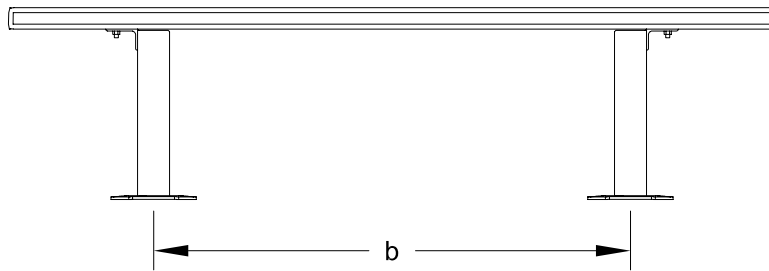

ALL DIMENSIONS IN INCHES

R. J. **THOMAS MFG. Co., INC.**
P.O. Box 946 • Cherokee, IA 51012

DRAWN BY
WWM

TITLE MODEL APB/P 6 AND 8 FOOT SURFACE MOUNT DOUBLE PEDESTAL BENCH WITH
10" WIDE PLASTISOL COATED EXPANDED STEEL SEAT

DATE 3-09-05

DWG. NO. **AI-1632**