



**Model PCXB3/G-15AL** Surface Mount Bench  
with Hot-Dip Galvanized Frames, 15 Ft. long  
with Aluminum back and seat.

- **Extra heavy design to be stronger and more stable with a simple, clean style.**
- **Sturdy, formed and welded steel frame construction**
- **Frames are Hot-Dip Galvanized after fabrication for superior corrosion resistance**
- **Structurally reinforced extruded Aluminum Seats with anodized finish**
- **Quality construction throughout**

#### **SPECIFICATIONS:**

- **Model PCXB** end frames are one-piece, welded construction with a back and seat bracket of 2-3/8" x 1-1/2" x 1/8" nominal sized, die-formed channel, and a 2.375" (2-3/8") O.D. post and foot to meet 2" nominal steel pipe size specifications. Frame foot is formed with flattened and rounded ends. A 9/16" hole is provided in each end of foot for optional surface mounting with concrete anchors (anchors not included).
- **Model PCXB3/G-15** is 15 ft. long (nom.) with three frames.
- **Model PCXB5/G-21** is 21 ft. long (nom.) with five frames.
- **Model PCXB5/G-24** is 24 ft. long (nom.) with five frames.
- **Standard:** All steel frames components are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. PCXB3/G-15AL).
- Aluminum is extruded 6063-T6 aluminum alloy in planks with dimensions equivalent to that of 2" x 10" nominal sized lumber. The plank design is 1-3/4" x 9-5/8" with four structural reinforcement ribs for greater rigidity. Aluminum planks are provided with a clear anodized finish as per anodizing specification 204 R1.
- Channel end caps are extruded 6063-T6 aluminum alloy provided with a clear anodized finish as per anodizing specification 204 R1. End caps are press fitted over ends of aluminum planks and mechanically fastened in place at the factory.
- Aluminum planks are provided with galvanized carriage bolts, nuts, and precision fitted aluminum brackets to fasten planks to bench frames.
- **Optional:** Color choices of powder coated steel frame components. For optional colors choices see Specification Bulletin #SPC-CO-001.

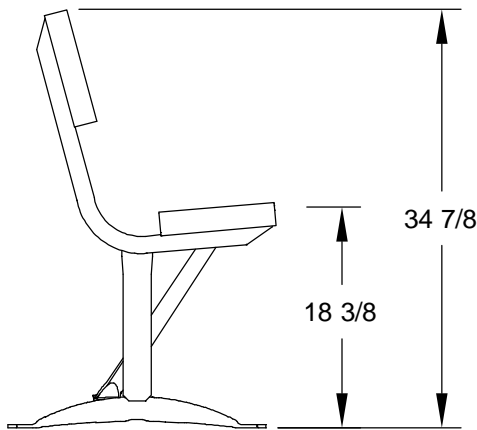
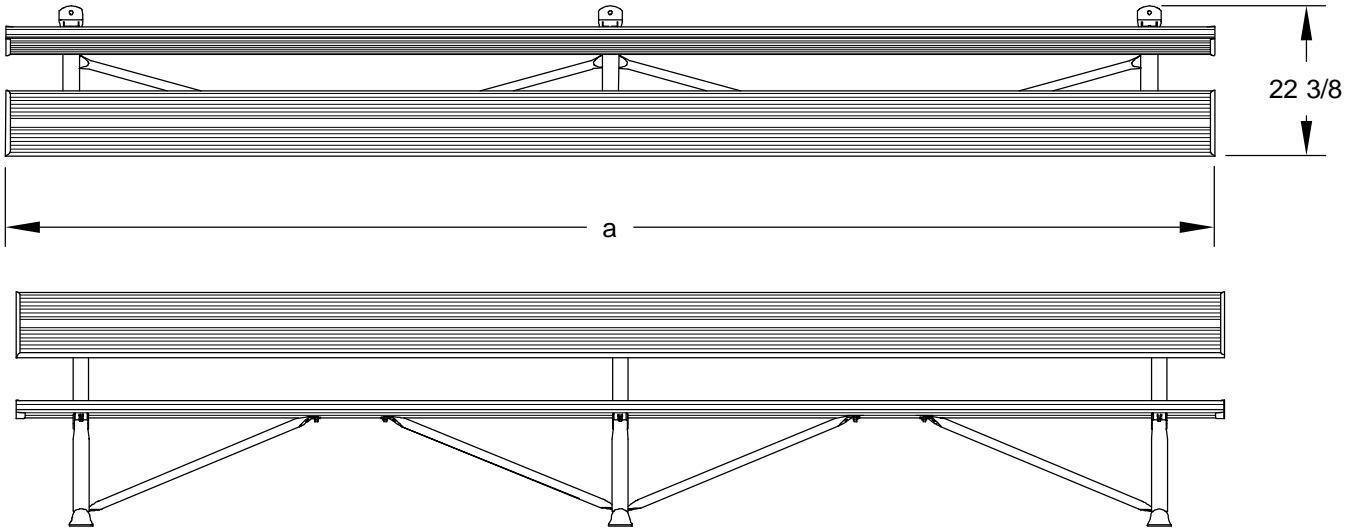
#### **AVAILABLE OPTIONS**




- 15', 21', or 24' models**  
**Powder Coat Finish in choice of colors for Steel**  
**Frame components**

**RJThomas Mfg. Co., Inc.**

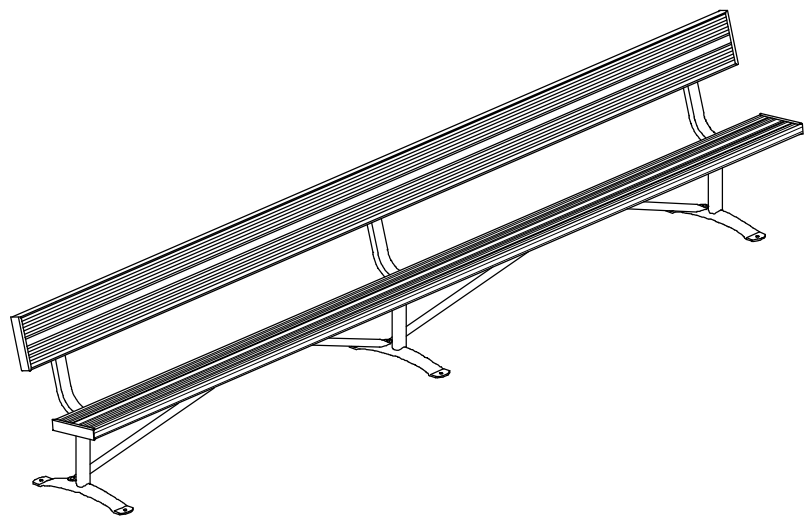
PO Box 946 • Cherokee, IA 51012-0946 • PH: 712-225-5115 • 800-762-5002 • FAX: 712-225-5796  
E-mail: pilotrock@rjthomas.com • Web Site: <http://www.pilotrock.com>

© 2008 RJThomas Mfg. Co., Inc. PILOT ROCK® Park Products is a registered trademark of RJThomas Mfg. Co., Inc.



MODEL NUMBER	DIMENSION			NO. OF FRAMES
	a	b	c	
PCXB3-15	180	80 1/4	160 1/2	3 
PCXB5-21	252	◇	243 1/2	5 
PCXB5-24	288	70	280	5 

◇ NOTE: PCXB5-21 FRAMES ARE SPACED 70 INCHES BETWEEN THE 3 INSIDE FRAMES, 51-3/4 INCHES BETWEEN OUTSIDE FRAME AND ADJACENT FRAME



ALL DIMENSIONS IN INCHES

**RJThomas**  
**Mfg. Co., Inc.**  
 P.O. Box 946  
 Cherokee, IA 51012

TITLE MODEL PCXB EXTRA HEAVY DUTY 15, 21, AND 24 FOOT  
 SURFACE MOUNT BENCH WITH ALUMINUM SEAT AND BACK

DRAWN BY WWM

DATE 8-14-08

DWG. NO. AI-1770